



## PEERLESS™ LLG & OG CALCIUM SULPHONATE GREASES

### Introduction

Petro-Canada PEERLESS™ greases are premium performance, multi-application greases formulated to reduce operating costs and provide extended protection in high temperature or wet operating conditions.

PEERLESS LLG combines three areas of high technology, namely:

- Petro-Canada ultra pure HT Severely Hydrocracked base oils
- Petro-Canada's patented and proven antioxidant chemistry
- The latest in calcium sulphonate complex grease thickeners


The PEERLESS OG line of extreme pressure (EP), high temperature multi-application greases are specially formulated to be highly effective in wet and marine environments. Based on a special calcium sulfonate complex thickener, these greases can absorb moderate amounts of water without softening, changing consistency or losing corrosion prevention capability.



PEERLESS LLG, OG1, OG2 and OG2 Red all meet NLGI Automotive Service Classification GC-LB for wheel bearing and chassis lubrication.

### Features and Benefits for PEERLESS LLG

- **Long life under high temperature provides long-lasting equipment protection**
  - PEERLESS LLG lasts longer than competitive premium multi-application grease at high temperature
  - PEERLESS LLG's high operating temperature provides extended protection under severe conditions compared to leading competitive products

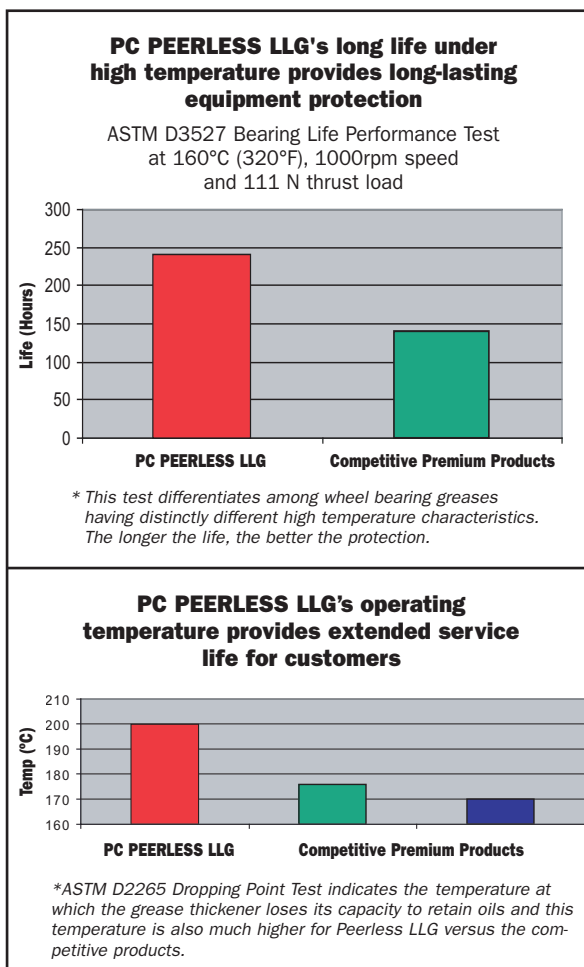


#### What is the HT difference?

Petro-Canada starts with the patented HT purity process to produce water-white, 99.9% pure base oils. The result is a range of lubricants, specialty fluids and greases that deliver maximum performance for our customers.




- **Excellent water resistance**
  - PEERLESS LLG superior water washout resistance reduces maintenance costs in wet environments
  - Stays in place in wet and marine applications
  - Maintains consistency after absorbing water
  - Strongly resists water wash-off and lengthens lubrication intervals

- **High mechanical stability in severe operating conditions**
  - PEERLESS LLG also lowers maintenance costs as a result of reduced product breakdowns under low to moderately high shear conditions
  - Reduces bearing wear and extends equipment life
  - Protects bearings under heavy loading

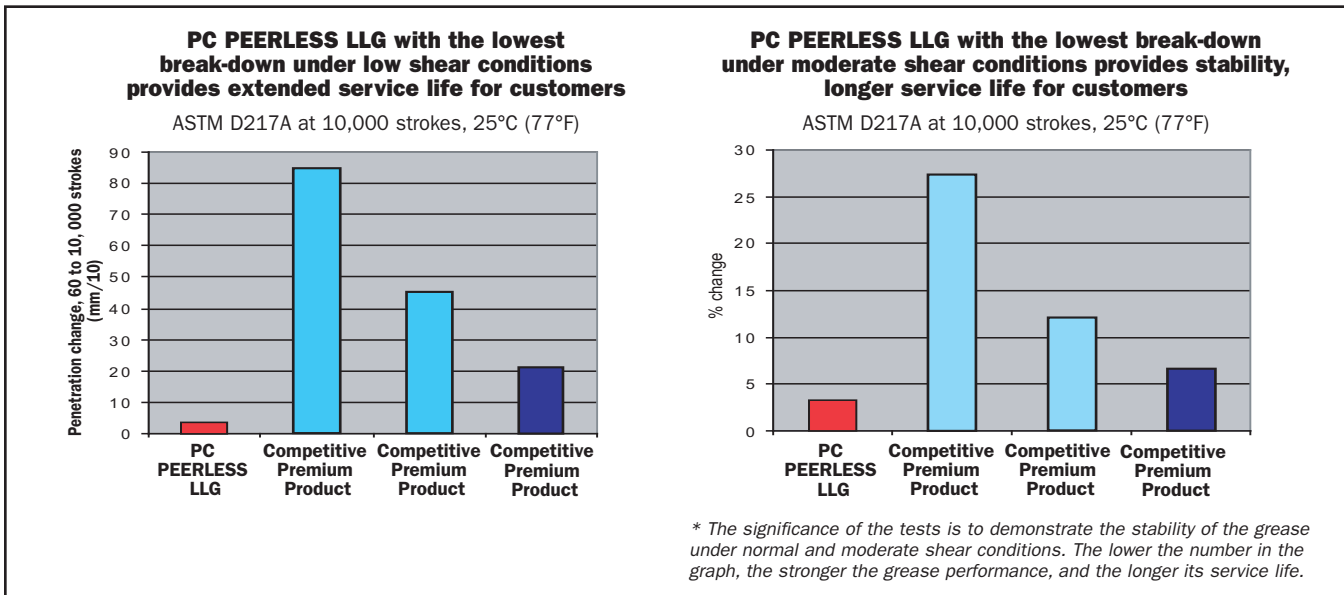

## Features and Benefits of PEERLESS OG Greases

- **Excellent performance in the presence of water**
  - Stays in place in wet and marine applications
  - Maintains consistency after absorbing water
  - Excellent resistance to washout
- **Wide temperature / pressure range**
  - Special thickener enhances high temperature and pressure capabilities
  - Low temperature hand-gun dispensing capability
  - Performs well in low ambient temperature applications
- **Great rust and corrosion protection**
  - Protects components in the presence of water
  - Reduces maintenance costs
- **Superior adhesive properties**
  - Protects rotating parts to reduce equipment costs
  - Excellent resistance to washout for better protection
- **State of the art formulations**
  - Excellent protection against rust and corrosion especially in marine applications
  - Excellent adhesive properties to protect rotating parts and reduce equipment cost
  - Built-in, non-sacrificial anti-oxidant chemistry for long life

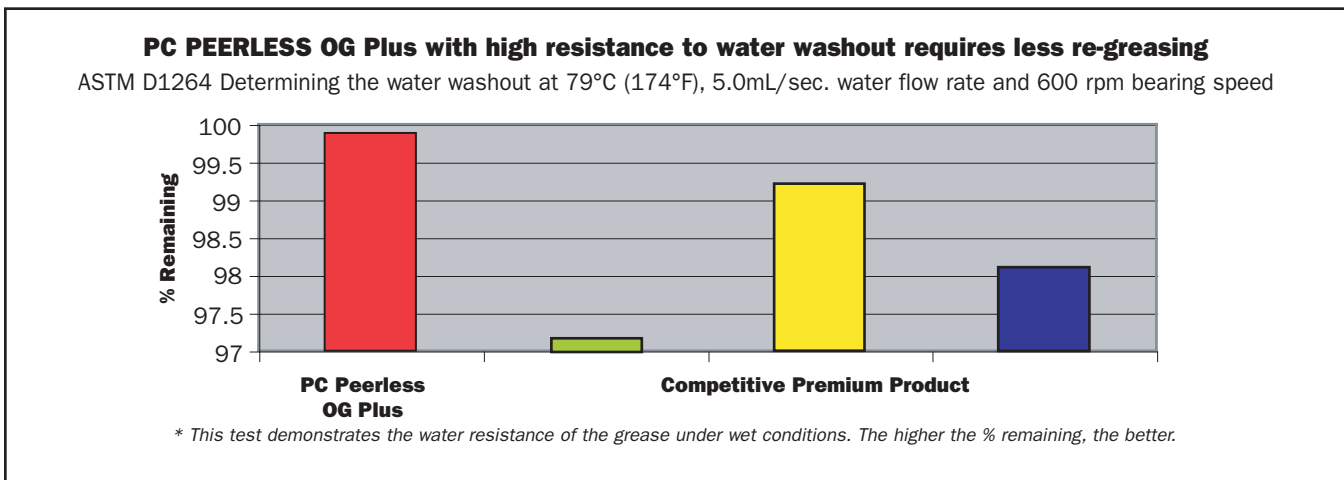

## Applications

Petro-Canada PEERLESS LLG and OG Greases are formulated to provide excellent lubrication in a wide range of applications especially under high temperature and extremely wet operating conditions. PEERLESS greases are recommended for a full range of industrial and automotive applications including:

- General Manufacturing
- Forestry
- Pulp & Paper
- Power Generating
- Fleet

### PEERLESS LLG

A premium multi-application calcium sulphonate complex grease, PEERLESS LLG provides outstanding oxidation stability, excellent water resistance, outstanding rust protection and excellent load carrying ability under high operating temperatures. It is particularly recommended for high temperature and long life applications which include:

- Equipment running continuously at temperatures up to 200°C/392°F and extremely wet conditions
- Wheel bearings and automotive chassis
- Sealed-for-life bearings
- Constant velocity joints
- Small appliance
- Ovens and Kilns

### PEERLESS OGO

A premium multi-application calcium sulphonate complex grease, PEERLESS OGO has excellent performance in the presence of water, wide operating temperature range, great rust and corrosion protection and superior adhesive properties. Applications include:

- Central lubricating systems
- Applications with low ambient temperatures
- Applications with the requirement for a softer grade product

### PEERLESS OG1

A premium multi-application calcium sulphonate complex grease, PEERLESS OG1 has excellent performance in the presence of water, wide operating temperature range, great rust and corrosion protection and superior adhesive properties. Applications include:

- Wheel bearings
- Automotive chassis
- Central lubricating systems

### PEERLESS OG2 AND OG2 RED

A premium multi-application calcium sulphonate complex grease, PEERLESS OG2 and OG2 Red have excellent performance in the presence of water, wide operating temperature range, great rust and corrosion protection and superior adhesive properties. Applications include:

- Wheel bearings
- Automotive chassis
- Forklift mast slides
- Power shovel bucket pins
- Mining scoop trams
- Rock crushers
- Farming Equipment
- Pulp press roller bearings

### PEERLESS OG PLUS

A premium multi-application calcium sulphonate complex grease, PEERLESS OG Plus is polymer enhanced and has excellent performance in the presence of water, wide operating temperature range, great rust and corrosion protection and superior adhesive properties. Applications include:

- Wet end bearings of paper mills
- Pulp press roller bearings
- Applications where superior adhesion is a key requirement

### PEERLESS SVG 102

A premium multi-application calcium sulphonate complex grease, PEERLESS SVG 102 has excellent performance in protecting valves against corrosion and deleterious effects of hydrogen sulphide present in the gas streams in the oil and gas industry. Applications include:

- Internal parts of valves used in production and distribution of sour gas
- Valves used in LPG and water injection systems in oil and gas industry

### PEERLESS XCG-FLEX

A premium multi-application calcium sulphonate complex coupling grease, PEERLESS XCG-Flex is a grease with outstanding mechanical stability and resistance to oil separation. It has a high-load carrying ability, high dropping point and excellent resistance to corrosion and water washout. It prevents oxidative fretting corrosion and protects against wear under potentially high gear tooth loadings and vibration. PEERLESS XCG-Flex meets AGMA coupling grease specifications CG-1 and CG-2. Applications include:

- High-speed flexible couplings where severe centrifugal forces are generated
- Industrial couplings of the gear and flexible steel type

## Operational Considerations

PEERLESS line of products provides long wear protection under normal operating conditions. However, actual grease life is dependent upon system design and operating practices. No Nonsense Lubricants Warranty applies.

## Typical Performance Data

| PROPERTY  | TEST METHOD  | PEERLESS           |                  |                  |                  |                  |                  |                   |                      |
|---|--------------|--------------------|------------------|------------------|------------------|------------------|------------------|-------------------|----------------------|
|   |              | LLG                | OGO              | OG1              | OG2              | OG2 RED          | OG PLUS          | SVG 102           | XCG-FLEX             |
| NLGI Grade  | D217         | 2                  | 0                | 1                | 2                | 2                | 2.5              | 1                 | 1                    |
| NLGI Standard   |              | GC-LB              | -                | GC-LB            | GC-LB            | GC-LB            | -                | -                 | -                    |
| Colour  | PCM 264      | Burgundy           | Tan              | Tan              | Tan              | Red              | Tan              | Green-Grey        | Brown                |
| Texture / Appearance  | PCM 264      | Buttery/Smooth     | Buttery/Smooth   | Buttery/Smooth   | Buttery/Smooth   | Buttery/Smooth   | Stringy/Smooth   | Buttery/Smooth    | Buttery/Smooth       |
| Dropping Point, °C/°F   | D2265        | 314/597            | 284/543          | 310/590          | 304/579          | 300/572          | 309/588          | 262/504           | 290/554              |
| Worked Penetration, 60 strokes  | D217A        | 284                | 366              | 329              | 276              | 270              | 249              | 324               | 335                  |
| Oxidation Stability 100 hrs, psi drop                                 | D942         | 2.2                | 2                | 2                | 2                | 2                | 2                | 3                 | -                    |
| Base Oil Viscosity, cSt @ 40°C/SUS @ 100°F<br>cSt @ 100°C/SUS @ 210°F | D445<br>D445 | 100/523<br>10.8/63 | 38/193<br>7.3/50 | 53/270<br>8.9/56 | 73/378<br>9.4/58 | 73/378<br>9.4/58 | 78/406<br>9.4/58 | 80/412<br>11.2/64 | 329/1764<br>22.5/112 |
| Timken OK Load, Kg/lb   | D2509        | 27/60              | 22.7/50          | 27/60            | 27/60            | 27/60            | 27/60            | 27/60             | 29.5/65              |
| Four Ball Weld Point, kg  | D2596        | 500                | 315              | 400              | 400              | 500              | 500              | 620               | 500                  |
| Four Ball Wear scar diam mm   | D2266        | 0.45               | 0.42             | 0.38             | 0.52             | 0.42             | 0.39             | 0.51              | 0.41                 |
| Copper Corrosion  | D4048        | 1b                 | 1b               | 1b               | 1b               | 1b               | 1b               | 1a                | 1b                   |
| Water Washout % @ 79°C /174°F   | D1264        | 1.5                | -                | 2.8              | 2.2              | 2.8              | 0.1              | 1.5               | 1.5                  |
| Temperature Range, °C   |              | -20 to 200         | -35 to 163       | -30 to 163       | -25 to 163       | -25 to 163       | -20 to 163       | -35 to 163        | -20 to 163           |
| Temperature Range, °F   |              | -4 to 392          | -31 to 325       | -22 to 325       | -13 to 325       | -13 to 325       | -4 to 325        | -31 to 325        | -4 to 325            |

The values quoted above are typical of normal production. They do not constitute a specification.

## Health and Safety

To obtain Material Health and Safety Data Sheets (MSDS), contact one of Petro-Canada's TechData Info Lines.

## TechData Info Lines

If you would like to know more about **Petro-Canada Peerless**, or any other product in our complete line of quality lubricants, please contact us at:

**Lubricants Head Office**  
**Petro-Canada Lubricants Inc.**  
**2310 Lakeshore Road West**  
**Mississauga, Ontario**  
**Canada L5J 1K2**



**Canada - West** . . . . . Phone 1-800-661-1199  
**- East (English)** . . . . . Phone 1-800-268-5850  
**(French)** . . . . . Phone 1-800-576-1686  
**Other Areas** . . . . . Phone (416) 730-2408  
**E-mail** . . . . . lubecsr@suncor.com  
**Website** . . . . . lubricants.petro-canada.ca

### Petro-Canada Europe Lubricants Limited

**Wellington House, Starley Way**  
**Birmingham International Park**  
**Solihull, B37 7HB, United Kingdom**

Telephone . . . . . +44 (0) 121 781 7264  
 Fax . . . . . +44 (0) 121 781 7401  
 UK Website . . . . . www.petro-canada.co.uk  
 German Website . . . . . www.petro-canada.de

### Petro-Canada America Lubricants

**980 North Michigan Avenue**  
**Suite 1400, #1431**  
**Chicago, Illinois**  
**USA 60611**

Phone . . . . . 1-888-284-4572  
 Fax . . . . . 1-708-246-8994  
 E-mail . . . . . email@petro-canadaamerica.com

### Petro-Canada Asia Pacific Holding Company Ltd.

**Jia Shi Lubricants Trading (Shanghai) Co. Ltd.**  
**1908 World Trade Tower**  
**500 Guangdong Road, Huangpu District**  
**Shanghai, China 200001**

Phone . . . . . +86-21-6362-0066  
 Fax . . . . . +86-21-6362-0536  
 E-mail . . . . . asiapacific@suncor.com  
 Website . . . . . www.petrocanada.cn

IM-8021E (2012.05)

Petro-Canada is a Suncor Energy business  
™Trademark of Suncor Energy Inc. Used under licence.

Beyond today's standards.

